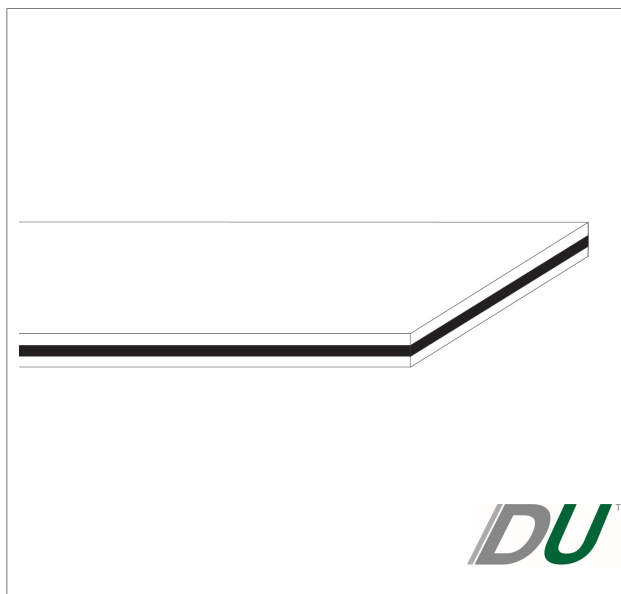


CODE CG-276
TYPE
DU1/30 W
COMPOSITION

Top surface	Material	Polyurethane (TPU)
	Finish	FL
	Colour	White
	Coefficient of friction	0.7
Traction core	Material	Polyamide (PA)
Bottom surface	Material	Polyurethane (TPU)
	Finish	FL
	Colour	White
	Coefficient of friction	0.7


TECHNICAL SPECIFICATIONS

Total thickness	3.00 mm	0.12 in.
Weight	3.00 kg/m ²	0.61 lbs./sq.ft
Minimum pulley diameter (1)	30 mm	1.2 in.
(1) The above mentioned values depend on running speed		
Pull for 1% elongation	5.0 N/mm	29 lbs./in.
Tensile strength	200 N/mm	1142 lbs./in.
Temperature resistance (2)	min.	-20 °C -4 °F
	max	100 °C 212 °F
(2) Use of the belt with limit values may reduce its life		
Humidity influence	yes	
Permanent antistatic dynamically (UNI EN ISO 21179)	yes	
Both sides can be used for power transmission	yes	

FEATURES

- Highest resistance to abrasion
- Outstanding flexibility
- Excellent coefficient to friction and performance maintenance over time
- Excellent resilience in the joining
- Excellent creep recovery of all strains to which it undergoes during particularly hard processing cycles

SUITABLE FOR

Box folding industry: folder-glurers

Paper industry: tube winders

Corrugated carton: flexo-folding

COMPLIANCES

REACH EC 1907/2006 Regulation and Amendments
 EC 1935/2004 Regulation and Amendments
 EC 2023/2006 Regulation and Amendments
 EU 10/2011, 2017/752 Regulation and Amendments
 FDA (Food and Drug Administration)


NOTES

Issue: 07-04-2016

Last Update: 25-05-2016

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

CODE CG-276

TYPE

DU1/30 W

• Recommended joining procedure

SKIVED JOINT '1'



Check our general catalogue to get further info on CHIORINO joining methods.


• Skiving instructions

Skiver	Belt thickness mm	Length mm	Straight/ diagonal cut	Cam/ wedge number	Pulley				Top cover			
					T mm	B mm	Thickness adjustment	End stop switch of working plate	T mm	B mm	Thickness adjustment	End stop switch of working plate
B600 A	3	60	Diagonal	5-28	---	---	---	---	---	-10	18,20	---
B300 SA	3	60	Diagonal	5-28	---	---	---	---	---	-10	11-12	---

• Guide to the use of adhesives

Apply the **K cement** on the polyamide part of the splices. Let dry for 5 minutes.
 Pour the **I hardener** with the **R cement** (pot-life 2 hours).
 Apply the above mix on the elastomer or leather part of the splices.
 Let dry for 5 minutes, then match the belt ends, paying attention to align properly.
 Press according to the instructions shown.
 To ensure best joint life it is advisable not to run or tension the belt for 24 hours.
 Kit: **GUMMICOL**

• Layout of components

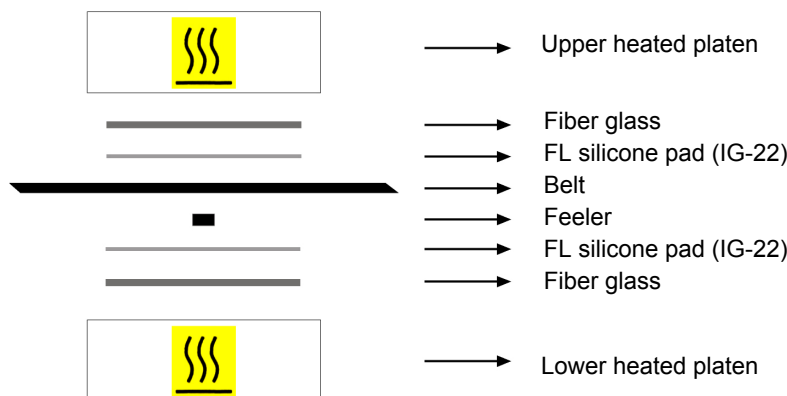

Press settings	
Upper platen temperature	120 °C
Lower platen temperature	120 °C
Curing time in press	15 min.
Driving torque	3 bar
Cooling time: it is recommended to remove the belt from the press once a temperature of 60/70 degrees C is reached.	

• Notes

Check the set temperature by means of a **feeler** ensuring 120 ± 5°C is reached on the platen that is in contact with the lower side of the belt.
Note: the feeler must be placed on a fill-in piece and not on the product joint (the procedure of checking the temperatures must be carried out and re-checked at least once a week).

Issue: 28-06-2016

Last Update: 24-01-2017

DISCLAIMER

The information contained in this document describes the features of the CHIORINO product as tested in a laboratory environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the CHIORINO product. CHIORINO cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.