


# HS-200AN

Pitch	25.4 mm
Minimum width	150 mm
Open area	0%
Approved	FDA
Rod	Ø 5 mm
Flight	Yes
Side guard	Yes
Curve	No

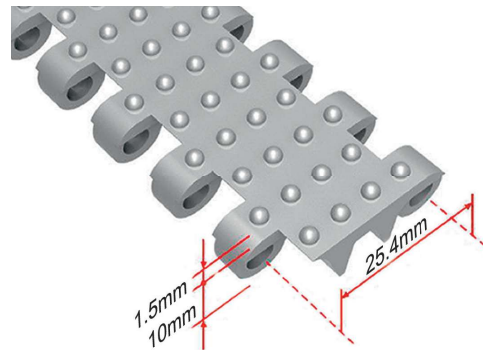

## DATA


Belt material	Belt strenght			Temperature		Belt weight [kg/m <sup>2</sup> ]
	Straight		Curve	°C [min.]	°C [max.]	
	kg/m[BW]	N/m[BW]				
Polypropylene	1155	11550	-	1	100	5.34
Polyethylene	1105	11050	-	-60	60	-
Acetal	1520	15200	-	-40	80	-
Nylon	1310	13100	-	1	180	-

BW - belt width

## COLOR TABLE

Polypropylene					Polyethylene					Acetal					Nylon				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●						●			●				●				●	

W - White, G - Grey, N - Nature, DB - Dark brown, B-Blue

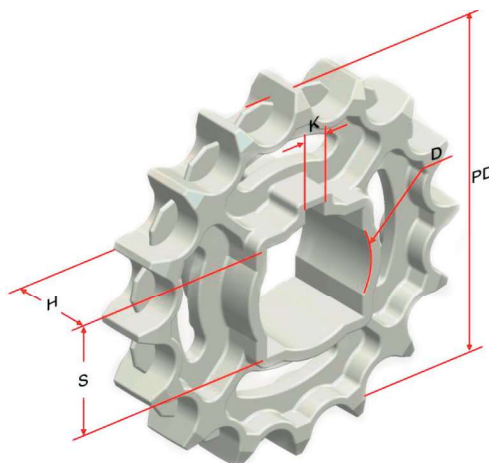

## SPROCKET DIMENSIONS

No. teeth	PD [mm]	S [mm]	D [mm]	H [mm]	K [mm]
8	64	-	30.5	22	6x6
10	83	38.5/40.5	25.5/30.5/45.5	22	7x7
12	98	35.5/38.5/40.5	25.5/30/45.5	38	7x7
16	130	35.5/38.5/40.5	25.5/30/47.5	34	7x7
20	162	40.5	47.5	38	7x7