


HS-2500B

Pitch	25.4 mm
Minimum width	200 mm
Open area	31.7%
Approved	FDA
Rod	Ø 5 mm
Flight	No
Side guard	No
Curve	No

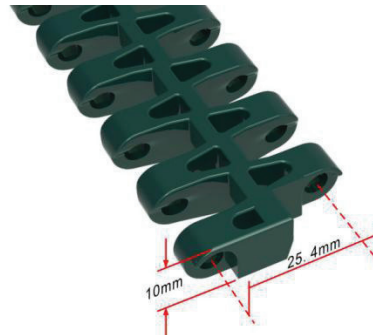

DATA


Belt material	Belt strenght			Temperature		Belt weight [kg/m ²]
	Straight		Curve	°C [min.]	°C [max.]	
	kg/m[BW]	N/m[BW]				
Polypropylene	1060	10600	-	1	110	5.15
Polyethylene	1030	10300	-	-60	60	5.41
Acetal	1720	17200	-	-40	85	8.15
Nylon	1520	15200	-	1	160	7.34

BW - belt width

COLOR TABLE

Polypropylene					Polyethylene					Acetal					Nylon				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●						●			●				●				●	

W - White, G - Grey, N - Nature, DB - Dark brown, B-Blue

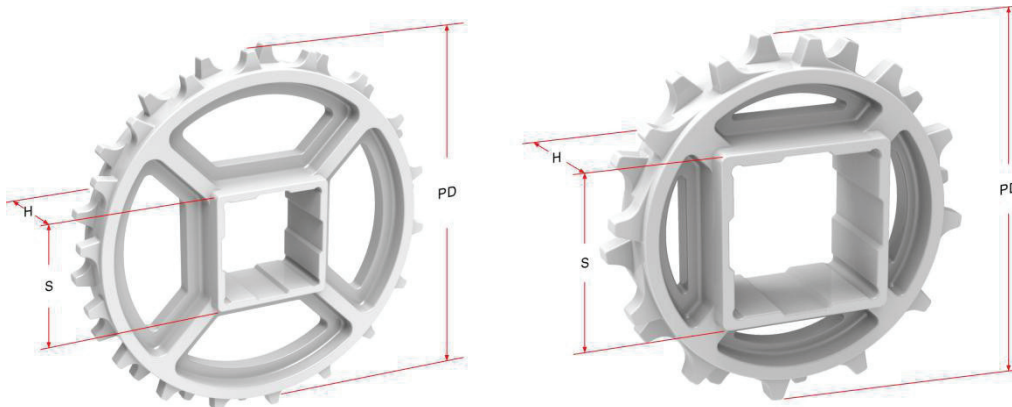

SPROCKET DIMENSIONS

No. teeth	PD [mm]	S [mm]	D [mm]	H [mm]	K [mm]
12-2R	98	38.5/40	25.5	20	8x8
15-2R	122	38.5/40	25.5	20	8x8
18-2R	146	38.5/40	30.5	20	7x7
20	162.4	60.5	-	30	-